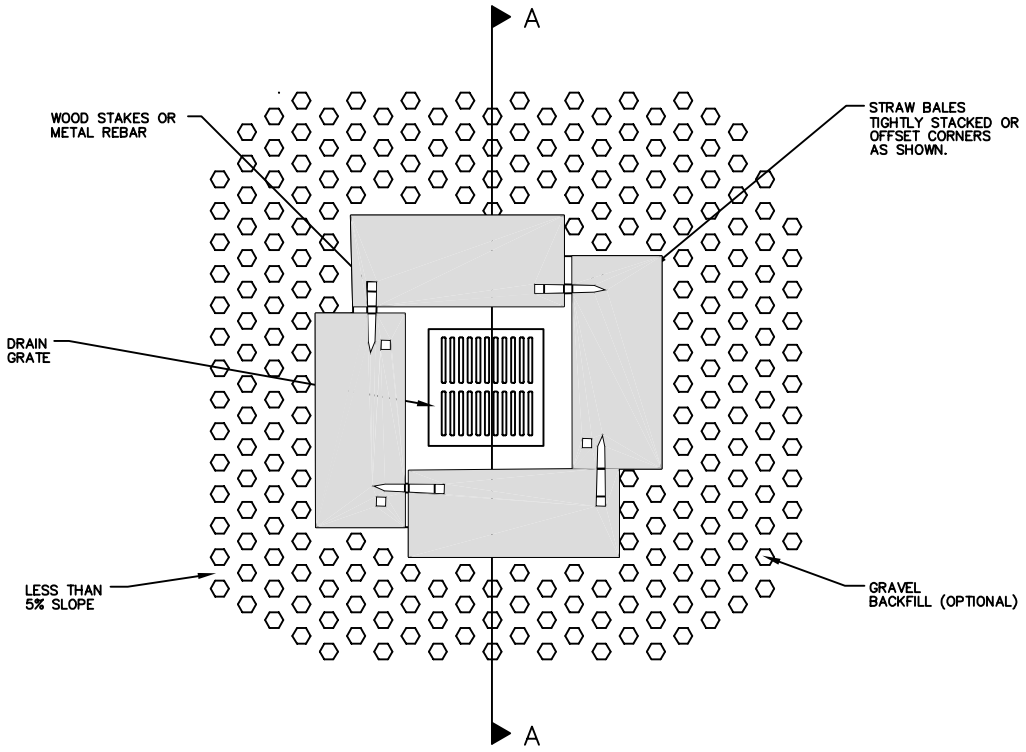

PLAN VIEW

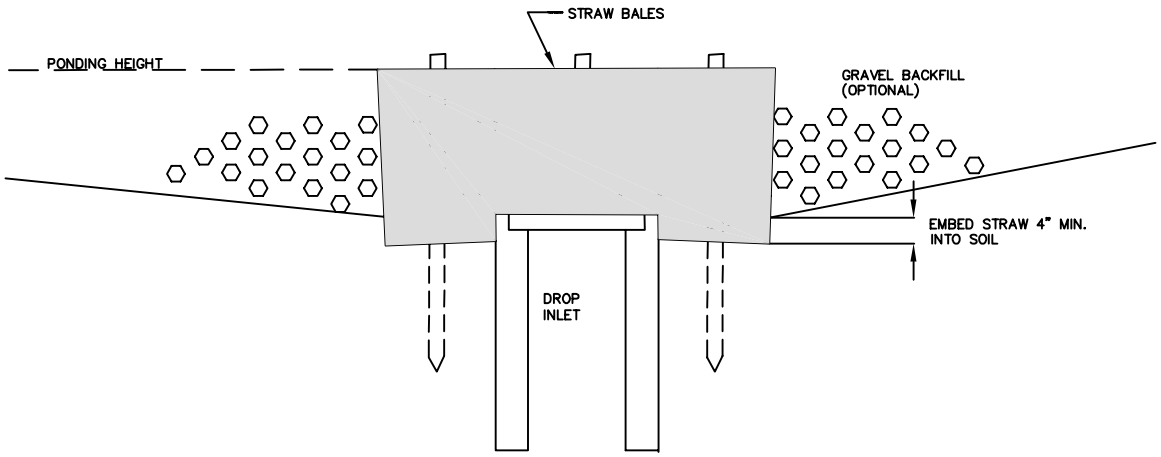

SECTION A–A

NOTES:

1. DROP INLET SEDIMENT BARRIERS ARE TO BE USED FOR SMALL, NEARLY LEVEL DRAINAGE AREAS. (LESS THAN 5% SLOPE).
2. EMBED THE BALES 4" INTO THE SOIL AND OFFSET CORNERS OR PLACE BALES WITH ENDS TIGHTLY BUTTED. GRAVEL BACKFILL WILL PREVENT EROSION OR FLOW AROUND THE BALES.
3. THE TOP OF THE STRUCTURE (PONDING HEIGHT) MUST BE WELL BELOW THE GROUND ELEVATION DOWNSLOPE TO PREVENT RUNOFF FROM BY–PASSING THE INLET. EXCAVATION OF A BASIN ADJACENT TO THE DROP INLET OR A TEMP–ORARY DIKE ON THE DOWNSLOPE OF THE STRUCTURE MAY BE NECESSARY.

Contacts:

The City Of Enid
Robert S. Hitt, Director of Engineering Services, Ext. 344
401 West Garriott Road
P.O. Box 1768
Enid, Oklahoma 73702
Telephone: (580) 234-0400 Fax: (580) 234-8848

Jason Brinley, Civil Engineer, Ext. 348

The City Of Enid, Oklahoma

REVISIONS

Number	Date	Description

Project Number:

Project Location:

Sheet Title: STANDARD STRAW BALE/GRAVEL DROP INLET SEDIMENT BARRIER

Project Title:

DD - 14

Engr. Seal:

REGISTERED PROFESSIONAL ENGINEER
ROBERT S. HITT
13111
OKLAHOMA

Date:	6/1/00
Scale:	NO SCALE
Cad File:	G:\DATA\SPECS\DD14
Drawn By:	CLH
Designed By:	R.H.
Approved By:	R.H.
Sheet:	of