



SECTION A - A

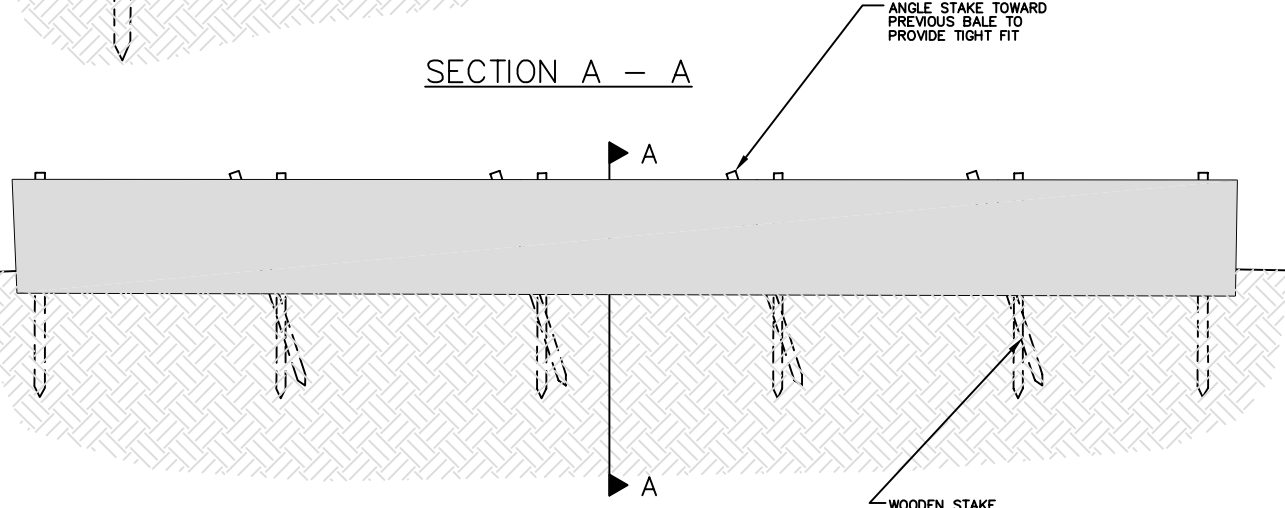

SECTION B - B

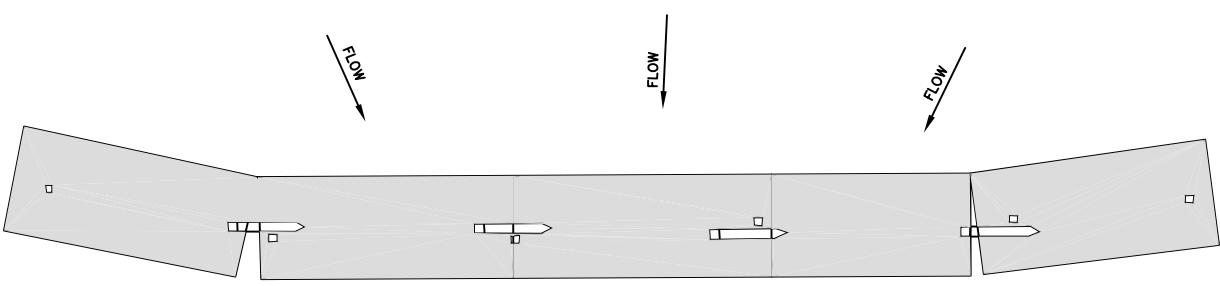

PLAN

NOTES:

1. THE STRAW BALES SHALL BE PLACED ON SLOPE CONTOUR.
2. PLACE BALES IN A ROW WITH THE ENDS TIGHTLY BUTTED. USE STRAW, ROCKS, OR FILTER FABRIC TO FILL GAPS BETWEEN THE BALES. TAMP THE BACKFILL MATERIAL TO PREVENT EROSION OR FLOW AROUND BALES.

The City Of Enid
 401 West Green K, Cornist Road
 Enid, OK 73702
 Telephone: (800) 234-0400 Fax: (800) 234-8946



Contacts:
 Robert Hitt, Director of Engineering Services, Est. 344
 James Brinkley, Civil Engineer, Est. 348

REVISIONS	
Number	Date

Project Number:	Project Location:
Project Title:	Project Title:
STRAW BALE BARRIER	DD - 15



Date:	6/1/00
Scale:	NO SCALE
Cad File:	g:\DATA\SPCS\VD015
Drawn By:	CLH
Designed By:	R.H.
Approved By:	R.H.
Sheet:	of