


PLAN

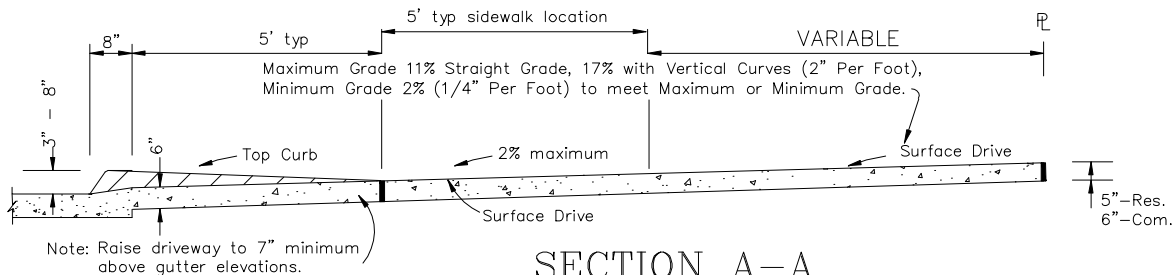

SECTION A-A

ORDINANCE # 3765

Driveway must be paved from street pavement to property line (or to existing sidewalk, with 3000# Portland Cement Concrete or type "B" Asphaltic Concrete. When using brick pavers, the section from the sawcut to the end of radius must be concrete or asphalt. Permit is required for making new curb opening and work on R/W.

NOTES

1. The property owner is responsible for any adjustment to structures including, but not limited to, manholes and water valves.
2. Concrete temperature may not exceed 90°F.
3. All sidewalk replacement must meet ADA requirements.



THE CITY OF ENID, OKLAHOMA

STANDARD
CONCRETE DRIVEWAY

G:\DATA\STANDARD\stddrive.dwg

DATE	DRAWN BY	SCALE	PROJECT NO.
5/98	CLH	NONE	
REVISIONS	DESIGNED BY	APPROVED BY	SHEET
7/21/08	J.B.	R.H.	1 OF 1

